



# FARR OUT FRAME-KIT




## SPECIFICATIONS

FRAME	ALLOY 6061-T6 CUSTOM TUBING, AVAILABLE XS TO XL SIZING
DRIVETRAIN	DESIGNED FOR 1X DRIVETRAIN, 36T RECOMMENDED
FORK	CROMO BUTTED, TAPERED STEERER 1.1/8 TO 1.5, A-C OF 483mm, 110 X 15mm, POSTMOUNT DISC
SEATCLAMP	34.9mm
SEATPOST	31.6mm
BOTTOM BRACKET	73mm THREADED
TYRE SPEC	74mm CLEARANCE, 29 X 2.25 MAX ( 23mm INTERNAL RIM WIDTH ) RECOMMENDED
ATTACHMENTS	2X BOTTLES IN MAIN FRAME, 3RD PLACEMENT UNDER DOWNTUBE, TOPTUBE MOUNTS FOR BAG ( 70mm )
FRAME SPACING	148 X 12mm / PITCH 1.5mm
FORK SPACING	110 X 15mm / PITCH 1.5mm
BRAKE SPEC	FRONT - POSTMOUNT / 160mm ROTOR, REAR - FLATMOUNT / 160mm ROTOR
HEADSET SPEC	INTEGRATED, 42mm UPPER, 52mm LOWER
WEIGHT	FRAME / TBA , FORK / 1405g ( 195mm STEERER LENGTH UNCUT )



# FARR OUT FRAME-KIT

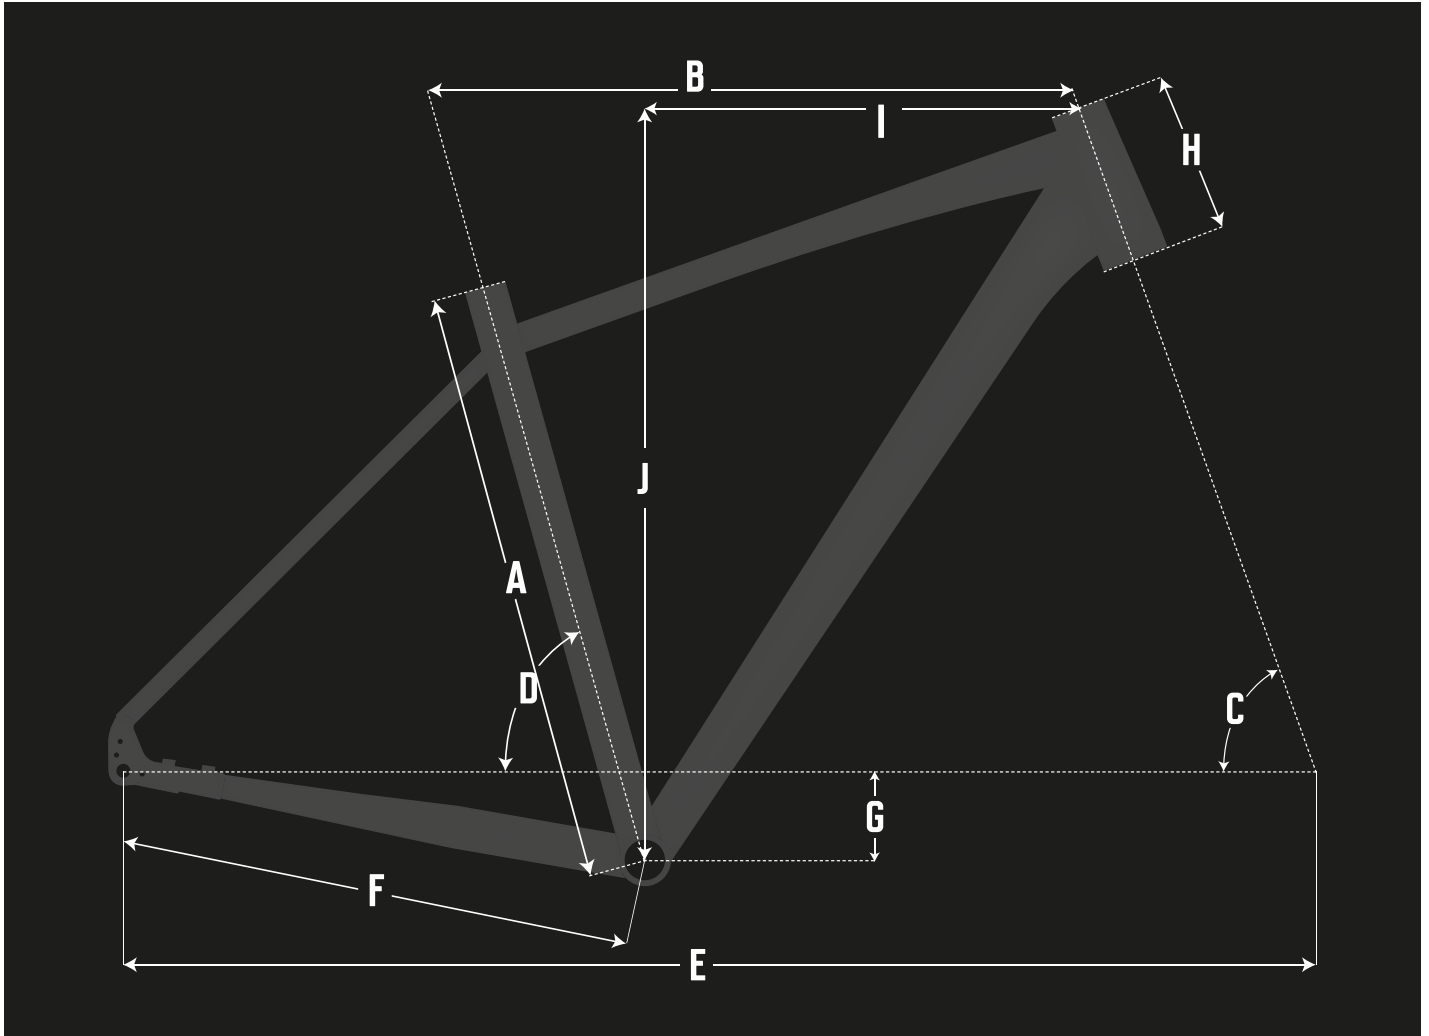

	XXS	XS	S	M	L	XL
<b>RECOMMENDED RIDER HEIGHT [cm]</b>	145-155	155-165	165-175	175-182	182-190	190+
<b>[A] SEATTUBE LENGTH</b>	430	470	500	530	560	580
<b>[B] TOPTUBE LENGTH</b>	500	520	540	560	580	600
<b>[C] HEADTUBE ANGLE</b>	69°	69°	69°	69°	69.5°	69.5°
<b>[D] SEATTUBE ANGLE</b>	74.5°	74.5°	74.5°	74.5°	74.5°	74.5°
<b>[E] WHEELBASE</b>	1030	1046	1072	1072	1105	1127
<b>[F] REAR CENTRE</b>	445	445	445	445	445	445
<b>[G] BB DROP</b>	75	75	75	75	72	72
<b>[H] HEADTUBE LENGTH</b>	120	120	135	150	175	195
<b>[I] REACH</b>	329	349	361	365	388	403
<b>[J] STACK</b>	618	618	632	646	669	688